
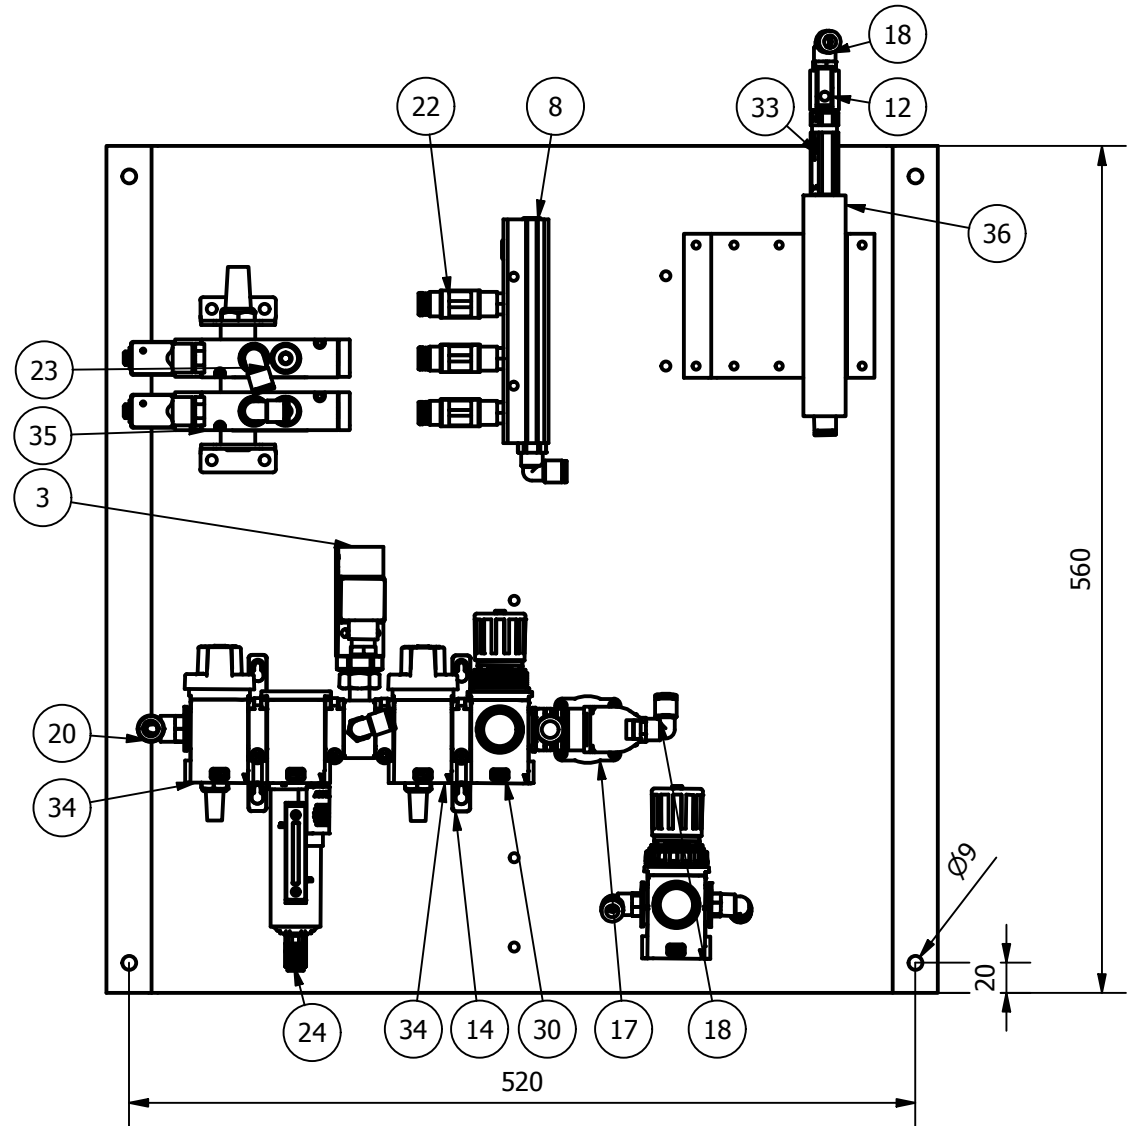


The reproduction, distribution and utilisation of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages.
All rights reserved in the event of the grant of a patent, utility model or design.

IM1 UNCONTROLLED WHEN PRINTED
This Drawing & Design are Confidential. Copyright © 2020 Norgren Limited.

1	2	3	4	5	6	7	8
POS	QTY	PART NUMBER	DESCRIPTION				
1	1	0000000.9100.02400	Bobine Click-on 8Watt 24VCC				
2	2	0555484000000000	Equerre de fixation pr 26394.				
3	1	0880300000000000	pressostat G1/4 0.5-8 Bar 18D				
4	1	150202828	mamelon 1/4_1/4				
5	1	150332828	Mamelon 3 pièces M-M, G1/4				
6	1	150400028	Équerre Mâle, 1/4"Bsp				
7	2	162060028	Bouchon 1/4" Bsp				
8	1	162B43828	Manifold 4x1/4+2x3/8				
9	2	250130028	bouchon, 1/4". laiton				
10	1	250130038	bouchon G3/8				
11	1	2639422000000000	embase 2 positions DN6 G 3/8				
12	1	601112228	Robinet sans purge, G1/4, F-M				
13	2	820014-51KIT	Clamp Excelon Plus				
14	2	820014-52KIT	equerre de fixation Excelon Plus				
15	1	820016-51KIT	Bloc dériv. Excelon Plus G1/4				
16	1	820068-51KIT					
17	1	8240000.9100.00000	EV Click-on 2/2NF G1/4 0,1-16B				
18	6	C01470828	Raccord coude male - Ø8 G1/4				
19	1	C01470838	coude 90°- Ø8-R3/8				
20	1	C01471028	coude 90°- Ø10-R1/4				
21	2	C01540828	Coude 90°Prolongé - Ø8-R1/4				
22	3	C01GJ0828	Vanne 3/2 R1/4-Ø8 filet->tube				
23	2	C02470828	équer.orient.90° Ø8-1/4",BSPP				
24	1	F82G-2GN-AD3	Filtre G1/4; 40MY; Auto.;				
25	1	LPB/FR/15145/FR	TOLE INOX 560x550x38 ep 2				
26	1	LPB/FR/15146/FR	TOLE INOX 126x94x2				
27	1	M/P24120/1	Connecteur Led+VDR 12-24V				
28	2	M/P24121/4	connect.+LED+VDR 24vdc				
29	2	QM/48/13J/21	bobine 22mm 24Vcc				
30	2	R82G-2GK-RMG	Régulateur Excelon Plus G1/4; 0.3-10bar				
31	4	T40C2800	Silencieux en bronze fritté G1/4				
32	1	T40C3800	Silencieux en bronze fritté G3/8				
33	1	T55C2800	clapet anti-retour G1/4fem-fem				
34	2	T82T-2GA-B1N	Vanne d'arrêt Excelon Plus G1/4				
35	2	V61B513A-A3000	distr.5/2 électro-ressort G1/4				
36	1	debitmetre	debitmetre_Krohne				

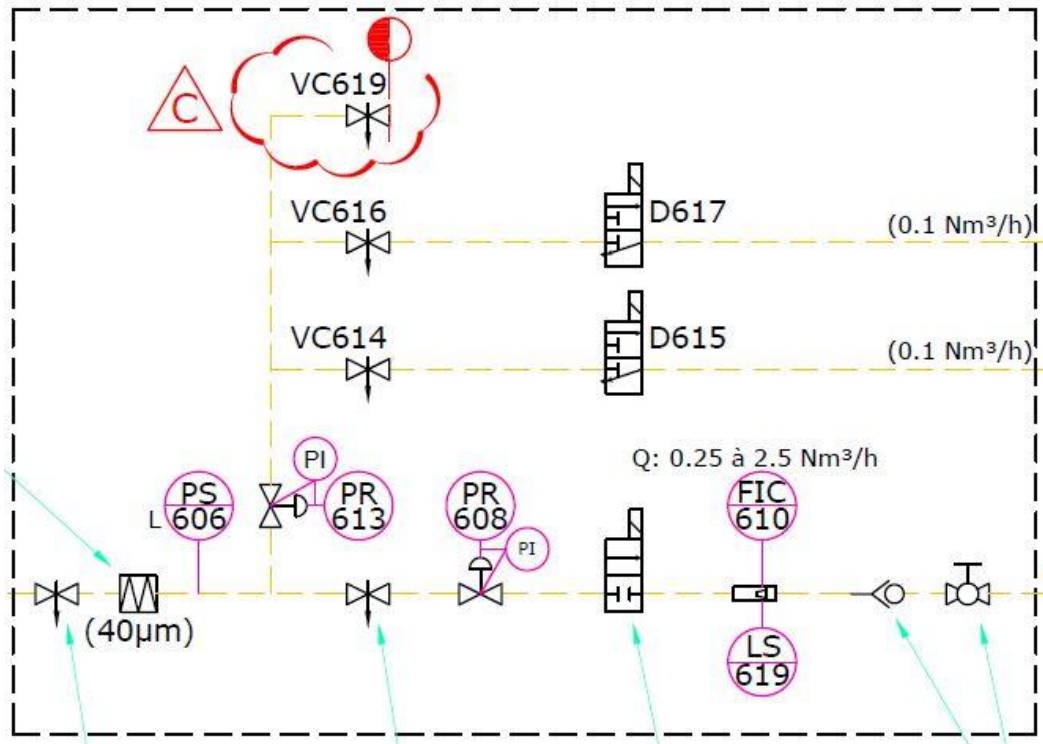

Cablage pneumatique non représenté en tube souple noir
pressostat 18D réglé a 6b pression montante
tension 24Vdc
plage débitmetres a préciser à la commande

A											
Revision		ECN Number		Change Description		Modified By		Date			
Surface Finishing:				Mass (Kg): N/A		Material:		Scale: 1 : 5		Size: A3	
First Used in Final Assembly:				Bill of Materials: No				General Tolerance: ISO 2768-mk		Roughness: VDA 2005	
		Name		Date		Tolerance Principle: DIN 7167 Projection 1st Angle: 		Description:			
Created:		fr_gla		17/03/2021							
Approved:											
Released:											
Any modifications are subject to the approval of the responsible design department.											
All Dimensions in Millimeters unless stated otherwise. Special Characteristics:  Critical Characteristics  Significant Characteristics						 NORGREN		Part Number: SPF_AR_KWI_A231_2400		Sheet: 1 / 1	
Filename: SPF_AR_KWI_A231_2400.idw						Replaces:		Work in Progress		Phase: Production	
						Design Ctrl:		FR-Collegien			